

# MALVA (BSM-ES, BSRM-ES) STAINLESS STEEL



### TYPES

- Straight (BSM-ES) and curved (BSRM-ES)

### TUBES

- Horizontal, round Ø 15 mm

### COLLECTORS

- Vertical, semi-round Ø 42 mm

### COLOURS

- Stainless steel type 316L, matt brushed with grain 360

### SPECIAL

- The horizontal tubes of type BSRM-ES are slightly bent (10°).
- Standard with straight cover cap in stainless steel

### BRACKETS

- Wall brackets standard
- BSM-ES also available as free-standing radiator, see p. 200

### TECHNICAL

- Electrically laser welded (invisible weld seams)
- Standard operating pressure: 10 bar
- Maximum operating temperature: 110°C

### ELECTRICAL (see chapter electrical radiators)

- ✗ Pure electrical radiator prefilled
- ✓ Mixed radiator

### TECHNICAL DRAWINGS

- See p. 204

### CONNECTION


- ✓ One-point connection for one-pipe system (see p. 301)
  - ✓ One-point connection for two-pipe system (see p. 301)
  - ✓ Two-point connection for one-pipe system (connection by way of the central connection) (see p. 300)
  - ✓ Two-point connection for two-pipe system (standard) (see p. 300)
  - ✗ Integrated valve
- For connection at the bottom a flow tube is needed, this flow tube is standard delivered in the right collector.
  - For connection at the top 45, 54 a special flow tube has to be ordered separately, which needs to be mounted in the return, see p. 303.

## ABOUT MALVA STAINLESS STEEL

### A timeless outperformer

The Malva Stainless Steel fills your intimate space with a soft, tranquil glow. The Malva concept in its most durable version, for a lifetime of enjoyment and 100% recyclable. A bathroom radiator that makes a statement: a timeless design with hard-wearing performance.

### RECOMMENDED CONNECTION (1188)

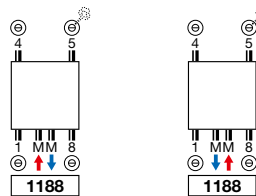

Other connection methods, see p. 202



ref. nr. 118210300009993  
Fittings, see p. 313

### RECOMMENDED FOR THE BATHROOM IN OPTION




drying- and stacking rack stainless steel  
BSM-ES ref. nr. 118300500009993  
BSRM-ES ref. nr. 118300600009993



BSM-ES

### HOW TO ORDER MALVA STAINLESS STEEL

Delivery time 15 - 30 working days  
(transport duration not included)

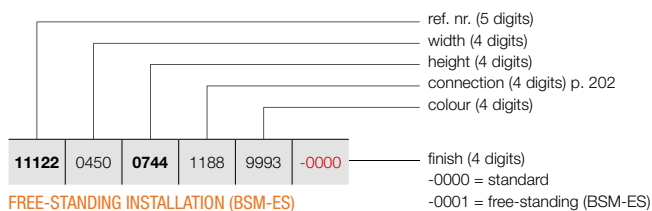


### FREE-STANDING INSTALLATION (BSM-ES)

See p. 200 for additional accessories.

### HOW TO ORDER STOCK RADIATOR MALVA STAINLESS STEEL

Delivery time 5 working days  
(transport duration not included)



## MALVA (BSM-ES, BSRM-ES) STAINLESS STEEL



BSM-ES







BSRM-ES






REFERENCE CODE CUSTOM MADE MALVA STAINLESS STEEL						TECHNICAL DATA						short ref. nr. stainless steel stock			
tubes	width (L mm)	height (H mm)	75/65/20 (Watt)	55/45/20 (Watt)	n-exp.	weight (kg)	water content (l)	electr. resistance (Watt)							
<b>REF. NR. MALVA STAINLESS STEEL BSM-ES : 11122</b>															
11122	0450	0744	1188	9993	-0000	21	450	744	259	137	1,24	5,85	2,70	-	-
		1122				32	450	1122	380	196	1,30	8,40	4,25	300	-
		1338				40	450	1338	451	233	1,29	9,96	5,07	500	-
		1689				50	450	1689	571	297	1,28	12,50	6,40	500	-
11122	0600	0744	1188	9993	-0000	21	600	744	334	175	1,26	6,90	3,05	300	-
		1122				32	600	1122	490	252	1,30	10,00	4,78	500	11122-02
		1338				40	600	1338	581	299	1,30	11,96	5,78	500	-
		1689				50	600	1689	736	385	1,27	15,15	7,43	750	11122-04
11122	0750	1338	1188	9993	-0000	40	750	1338	708	364	1,30	13,96	6,50	750	-
		1689				50	750	1689	896	468	1,27	17,80	8,45	1000	-
<b>REF. NR. MALVA STAINLESS STEEL BSRM-ES : 11125</b>															
11125	0450	0744	1188	9993	-0000	21	450	744	259	137	1,24	5,85	2,70	-	-
		1122				32	450	1122	380	196	1,30	8,40	4,25	300	-
		1338				40	450	1338	451	233	1,29	9,96	5,07	500	-
		1689				50	450	1689	571	297	1,28	12,50	6,40	500	-
11125	0600	0744	1188	9993	-0000	21	600	744	334	175	1,26	6,90	3,05	300	-
		1122				32	600	1122	490	252	1,30	10,00	4,78	500	-
		1338				40	600	1338	581	299	1,30	11,96	5,78	500	-
		1689				50	600	1689	736	385	1,27	15,15	7,43	750	-
11125	0750	1338	1188	9993	-0000	40	750	1338	708	364	1,30	13,96	6,50	750	-
		1689				50	750	1689	896	468	1,27	17,80	8,45	1000	-

CE 05 in conformity with EN442-1: radiators and convectors

For heat outputs in other regimes, see p. 308 (correction factors)

# BATHROOM RADIATORS FREE-STANDING INSTALLATION IN OPTION

FREE-STANDING INSTALLATION	COLOUR	REF.NR.
 <p><b>FREE-STANDING INSTALLATION</b></p>	<b>BSM-S</b>	
	RAL 9016	118100300009016
	COLOUR	11810030000xxxx
<ul style="list-style-type: none"> <li>free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosetts in the colour RAL 9016.</li> <li>free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosetts.</li> </ul>		
 <p><b>FREE-STANDING INSTALLATION</b></p>	<b>BSM-ES</b>	
	STAINLESS STEEL	*
<ul style="list-style-type: none"> <li>free-standing radiators in stainless steel: 2 welded lateral supports, 1 foot (H = 150 mm) and 1 roset in stainless steel.</li> <li>* Please indicate <b>code -0001</b> for "Finish" when ordering.</li> </ul>		
 <p><b>FREE-STANDING INSTALLATION</b></p>	<b>HDM</b>	
	RAL 9016	118100100009016
	COLOUR	11810010000xxxx
<ul style="list-style-type: none"> <li>free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 1 foot (H = 150 mm) and 1 roset in the colour RAL 9016.</li> <li>free-standing radiators in other colours: 2 separate lateral supports, 1 foot (H = 150 mm) in the colour of the radiator and 1 chrome plated roset.</li> </ul>		
 <p><b>FREE-STANDING INSTALLATION</b></p>	<b>HRM</b>	
	RAL 9016	118100400009016
	COLOUR	11810040000xxxx
<ul style="list-style-type: none"> <li>free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosetts in the colour RAL 9016.</li> <li>free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosetts.</li> </ul>		
 <p><b>FREE-STANDING INSTALLATION</b></p>	<b>HR2</b>	
	RAL 9016	118100500009016
	COLOUR	11810050000xxxx
<ul style="list-style-type: none"> <li>free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosetts in the colour RAL 9016.</li> <li>free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosetts.</li> </ul>		
 <p><b>FREE-STANDING INSTALLATION</b></p>	<b>HF2</b>	
	RAL 9016	*
	COLOUR	*
<ul style="list-style-type: none"> <li>free-standing radiators in the colour RAL 9016: 2 separate lateral supports, 2 feet (H = 150 mm) and 2 rosetts in the colour RAL 9016.</li> <li>free-standing radiators in other colours: 2 separate lateral supports, 2 feet (H = 150 mm) in the colour of the radiator and 2 chrome plated rosetts.</li> <li>* Please indicate <b>code -0001</b> for "Finish" when ordering.</li> </ul>		


ACCESSORIES	COLOUR	REF.NR.
<b>BSM-S / BSM-ES / BSM-C</b>		
<p><b>DRYING- AND STACKING RACK STRAIGHT</b></p>  <ul style="list-style-type: none"> <li>• h = 15 mm; b = 350 mm; d = 94 mm; a = 45 mm</li> </ul>	STAINLESS STEEL	118300500009993
<b>BSRM-S / BSRM-ES / BSRM-C</b>		
<p><b>DRYING- AND STACKING RACK CURVED</b></p>  <ul style="list-style-type: none"> <li>• h = 15 mm; b = 338 mm; d = 94 mm; a = 45 mm</li> </ul>	STAINLESS STEEL	118300600009993
<b>HF / HF2</b>		
<p><b>TOWEL RAIL</b></p>  <ul style="list-style-type: none"> <li>• h = 22 mm; b = 670 mm; d = 85 mm; a = 60 mm</li> </ul>	CHROME	118322400000099
<b>HF / HF2</b>		
<p><b>HOOK O-RING</b></p>  <ul style="list-style-type: none"> <li>• h = 22 mm; b = 22 mm; d = 42 mm</li> </ul>	CHROME	118360200000099
<b>HF / HF2</b>		
<p><b>HOOK WITH A WIDE GROOVE</b></p>  <ul style="list-style-type: none"> <li>• h = 22 mm; b = 22 mm; d = 42 mm</li> </ul>	CHROME	118340200000099
<b>HF / HF2</b>		
<p><b>DRYING- AND STACKING RACK NARROW</b></p>  <ul style="list-style-type: none"> <li>• h = 22 mm; b = 385 mm; d = 163 mm; a = 30 mm</li> </ul>	CHROME	118300900000099
<b>HF / HF2</b>		
<p><b>DRYING- AND STACKING RACK LARGE</b></p>  <ul style="list-style-type: none"> <li>• h = 22 mm; b = 530 mm; d = 163 mm; a = 30 mm</li> </ul>	CHROME	118301200000099

d = distance front of the accessory up to front of the radiator  
a = distance accessory up to the radiator

**available from stock**

# BATHROOM RADIATORS ACCESSORIES

IN OPTION


ACCESSORIES	COLOUR	REF.NR.
 <p>FOLDING DRYING AND STACKING RACK</p>	<b>BSM-S / BSRM-S / BSM-ES / BSRM-ES / BSM-C / BSRM-C</b>	
	CHROME	118300100000099
	<b>HDM / HDRM / HRM / HRBM</b>	
	CHROME	118300200000099
<b>HX</b>		
CHROME	118300300000099	
<b>HRM-C / HRBM-C</b>		
CHROME	118300400000099	

- Standard included with Malva Lacquered, Malva Chrome, Prado, Iris, Agave Lacquered, Agave Chrome.
- 380 x 158 mm


available from stock

## BATHROOM RADIATORS CONNECTIONS

**COCOS PLUS:** C-PL  
**AGAVE LACQUERED:** HR2  
**ASTER:** HF (NON STOCK)  
**ASTER:** HF2

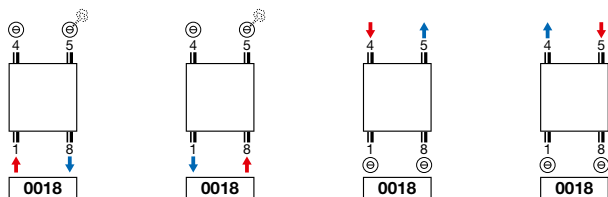

**MALVA LACQUERED:** BSM-S / BSRM-S  
**MALVA STAINLESS STEEL:** BSM-ES / BSRM-ES  
**MALVA CHROME:** BSM-C / BSRM-C  
**PRADO:** HX  
**IRIS:** HDM / HDRM  
**AGAVE LACQUERED:** HRM / HRBM  
**AGAVE CHROME:** HRM-C / HRBM-C  
**ASTER:** HF (STOCK) / HF (NON STOCK)

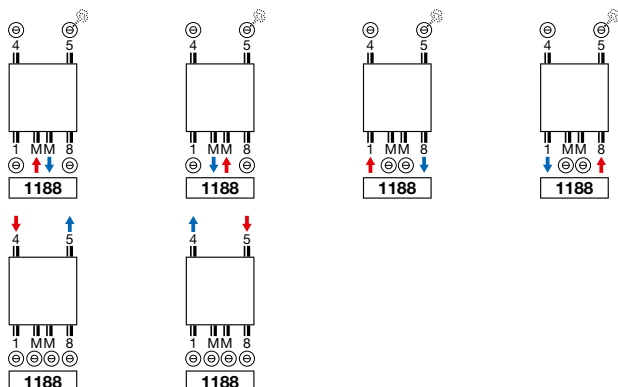

**Attention:** connecting the radiator can only be as shown by the connecting icons. For any other connection method, we take no responsibility.